

CPS Filtration Inc.


Clear Process Solutions

Quality Products For Demanding Environments

High Efficiency Liquid Filter Bags

High Efficiency Microfiber Filter Bags

- Micron Ratings From 1.0 to 50.0
- All Industry Standard and Custom Sizes Available
- Choice of Metal Ring Tops or Molded Super Seal Tops
- Wide Chemical Compatibility
- Excellent Oil Absorbing Capabilities
- Handles on all bags
- Efficiencies to 95.0%

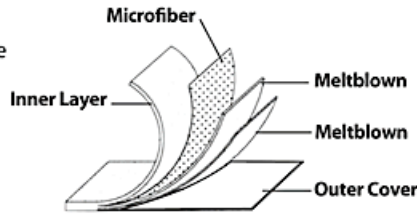

HIGH EFFICIENCY FILTER BAG



High Efficiency Bag Materials

Microfiber materials provide high efficiencies at low micron ratings. The optional addition of a needle punched felt layer provides a prefilter zone and results in extended life.

This multilayer technology option results in a true graded density material with high performance levels.

High Efficiency Bag Styles

Standard ring bags have a galvanized steel ring (stainless steel optional) sewn in the top of the bag. They are supplied with sewn seams standard.

Molded Super Seal top filter bags have a plastic top sewn to the filter bag.

| High Efficiency Materials (95.0% Min.) | Micron Ratings | | | | | |
|--|----------------|----|----|-----|-----|-----|
| | 1A | 2A | 5A | 10A | 25A | 50A |
| Polypropylene | • | • | • | • | • | • |
| Polyester | • | • | • | • | • | • |

Ordering Information

| Media Type | Micron Rating | Bag Dimensions | | | Ring / Flange Styles | Options |
|----------------------|---------------|----------------|-------|--------|-------------------------|--|
| | | Size | Diam. | Length | | |
| POMF - Polypropylene | See Chart | P1 = | 7.06" | 16.5" | S = Galvanized steel | H = Handle (Standard on all ring style bags) |
| PEMF - Polyester | See Chart | P2 = | 7.06" | 32.0" | SS = Stainless steel | |
| | | P3 = | 4.12" | 8.0" | PP = Polypropylene ring | |
| | | P4 = | 4.12" | 14.0" | T = Titanium | |
| | | P5 = | 4.12" | 24.0" | P = AJR-P Flange | |
| | | P7 = | 5.50" | 15.0" | F = AJR-F Flange | |
| | | P8 = | 5.50" | 21.0" | OSS = AJR-OSS | |
| | | P9 = | 5.50" | 31.0" | NR = No ring | |
| | | P11 = | 8.50" | 16.0" | | |
| | | P12 = | 8.50" | 30.0" | | |
| | | C1 = | 7.31" | 16.5" | | |
| | | C2 = | 7.31" | 32.5" | | |
| | | RP-1 = | 8.0" | 30.0" | | |
| | | RP-2 = | 8.0" | 40.0" | | |
| | | PC-1 = | 9.0" | 20.0" | | |
| | | PC-2 = | 9.0" | 30.0" | | |
| | | X1 = | 4.35" | 8.0" | | |
| | | X2 = | 4.35" | 14.0" | | |
| | | XO1 = | 6.0" | 22.0" | | |